
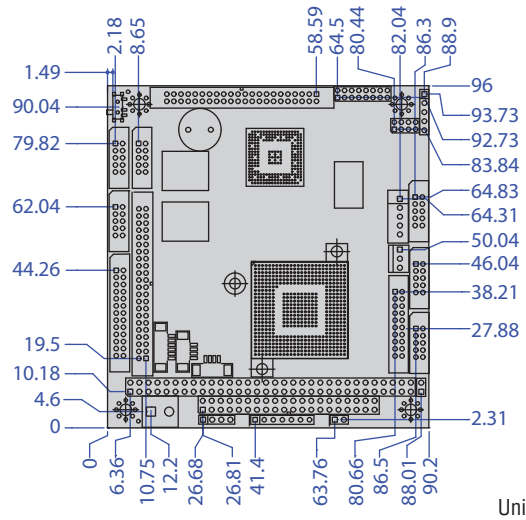


# VSX-6153-V2

128MB/4S/2USB/VGA/LCD/LVDS/LAN/GPIO/CF

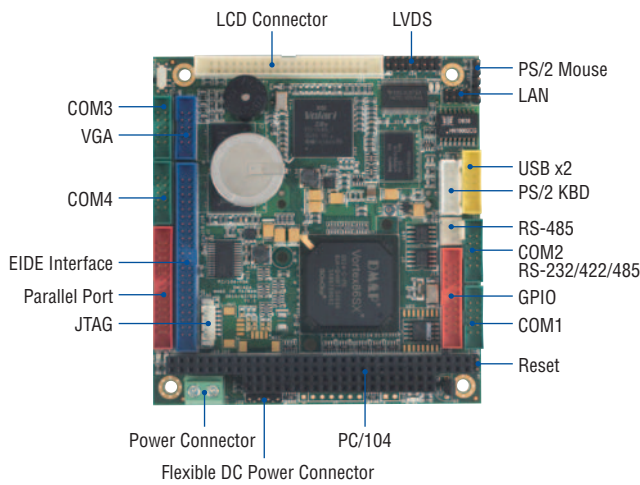

## Specifications

<b>SoC</b>	DM&P SoC CPU Vortex86SX- 300MHz Real Time Clock with Lithium Battery Backup
<b>Cache</b>	L1:16K I-Cache, 16K D-Cache
<b>Bus</b>	PC/104 standard compliant
<b>BIOS</b>	AMI BIOS
<b>System Memory</b>	128/256MB DDR2 Onboard
<b>Watchdog Timer</b>	Software programmable from 30.5μ sec. to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
<b>VGA</b>	XGI Volari Z9s Chipset VGA and TFT/LVDS Flat Panel Interface Support Onboard 32MB VGA Memory, support resolution up to 1280x1024, 16M colors
<b>LAN</b>	Integrated 10/100Mbps Ethernet
<b>Audio</b>	CM119 USB audio controller (Optional)
<b>Flash Disk Support</b>	Onboard 2MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above) Compact Flash Type I/II
<b>I/O Interface</b>	Enhanced IDE port x1 RS-232 port x3 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x1 10/100Mbps Ethernet port x1
<b>Connectors</b>	2.0mm 44-pin box header for IDE x1 2.0mm 44-pin box header for LCD x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x1 2.0mm 16-pin header for LVDS x1 2.0mm 10-pin box header for VGA x1 2.0mm 10-pin box header for USB x1 2.0mm 10-pin box header for RS-232 x4 2.0mm 8-pin header for Ethernet x1 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin header for Mouse x1 2.54mm 4-pin header for -5V, -12V +12V, GND x1 2.54mm 3-pin header for RS-485 x1 2.54mm 2-pin header for Reset x1 2.54mm 7-pin header for Redundancy Signal x1 (Optional) 2.54mm 2-pin header for System-Fail-SW x1 (Optional) 1.25mm 6-pin wafer for JTAG x1 1.25mm 4-pin wafer for Line-out/MIC-in x2 (Optional)
<b>Power Requirement</b>	Single Voltage +5V @ 700mA
<b>Weight</b>	90g
<b>Board Size</b>	90 x 96mm (3.54 x 3.77 inches)

<b>Operating Temperature</b>	-20°C ~ +70°C -40°C ~ +85°C (Optional)
------------------------------	---

## Packing List

- VSX-6153-V2 x1
- CD for User's Manual & Driver x1
- Cable
  - HDD 44P (2.0) x1
  - PRINT (2.0) x1
  - VGA (2.0) x1
  - RS-232 (2.0) x4
  - USB (2.0) x1
  - NET 4 x 2 (2.0) x1
  - GPIO (2.0) x1
  - PS2 KB White x1
  - PS2 Mouse Black x1
- Screw Kit x1

## Ordering Information

- VSX-6153-V2** Vortex86SX PC/104 CPU Module with 128MB DDR2

## Download User's Manual

[http://www.microcomputersystems.com/VSX-6153-V2\\_Man.pdf](http://www.microcomputersystems.com/VSX-6153-V2_Man.pdf)

## Download Price List

<http://www.microcomputersystems.com/price.pdf>

Compact Flash Type I/II



VSX-6153-V2

1

μProcessor Module

2

Tiny Module

3

PC/104 CPU module

4

Hall-Size CPU module

5

3.5" CPU module

6

Peripheral Module

7

Display Product Series

8

Accessories & Technical Information